



PN NXURVX650BZ
EAN 8436532166952

URANO VX650W

FEATURES

- ATX power supply with active PFC
- 80 PLUS Bronze Certificate: up to an 85% efficiency guaranteed
- Supports ATX12V v2.4 / 2.3 / 2.2 / 2.01
- Eco friendly: RoHS and ERP 2013 directives complied
- OVP, OPP, SCP, UVP protections
- Flat extra long cables
- 120 mm ultra silent fan with PWM control
- +12V single rail
- Dimensions: 150 x 140 x 85 mm | Net weight: 1.42 Kg



PN NXURVX750BZ
EAN 8436532166969

URANO VX750W

FEATURES

- ATX power supply with active PFC
- 80 PLUS Bronze Certificate: up to an 85% efficiency guaranteed
- Supports ATX12V v2.4 / 2.3 / 2.2 / 2.01 & EPS 12V 2.92
- Eco friendly: RoHS and ERP 2013 directives complied
- OVP, OPP, SCP, UVP, OPT, +3.3V & +5V OCP protections
- Flat extra long cables
- 140 mm ultra silent fan with PWM control
- +12V single rail
- Dimensions: 150 x 160 x 85 mm | Net weight: 1.95 Kg




PN NXURTX850BZ
EAN 8436532166976

URANO TX850W


FEATURES

- ATX power supply with active PFC
- 80 PLUS Bronze Certificate: up to an 85% efficiency guaranteed
- Supports ATX12V v2.4 / 2.3 / 2.2 / 2.01 & EPS 12V 2.92
- Eco friendly: RoHS and ERP 2013 directives complied
- OVP, OPP, SCP, UVP, OPT, +3.3V & +5V OCP protections
- Flat extra long cables
- 140 mm ultra silent fan with PWM control
- +12V single rail
- Dimensions: 150 x 160 x 85 mm | Net weight: 2.3 Kg


CONNECTORS




ATX MB
20+4 pin
1 unit
60 cm




EPS+12V
8 (4+4) pin
1 unit
60 cm



PCI Express*
6+2 pin
1 unit, 60 cm
1 unit, 75 cm



SATA
2 units, 60 cm
2 units, 75 cm
2 units, 90 cm



Molex 4 pin
1 unit, 60 cm
1 unit, 75 cm
FDD 1 unit, 90 cm

* TX 850W: 2 units, 60 cm / 2 units, 75 cm

VOLTAGES

650W	AC INPUT	200-240 Vac, 47-63 Hz, 3.5A				
	DC OUTPUT	+3.3V	+5V	+12V	-12V	+5VSB
	Max. Output Current	20A	20A	50A	0.3A	2.5A
	Max. Combined Wattage	120W		600W	3.6W	12.5W
	Maximum Power	650W				

750W	AC INPUT	200-240 Vac, 47-63 Hz, 5A				
	DC OUTPUT	+3.3V	+5V	+12V	-12V	+5VSB
	Max. Output Current	25A	25A	62A	0.5A	3A
	Max. Combined Wattage	130W		744W	6W	15W
	Maximum Power	750W				


850W	AC INPUT	200-240 Vac, 47-63 Hz, 6A				
	DC OUTPUT	+3.3V	+5V	+12V	-12V	+5VSB
	Max. Output Current	25A	25A	70A	0.5A	3A
	Max. Combined Wattage	130W		840W	6W	15W
	Maximum Power	850W				



80 PLUS BRONZE
CERTIFIED
POWER SUPPLY



EFFICIENCY 230V

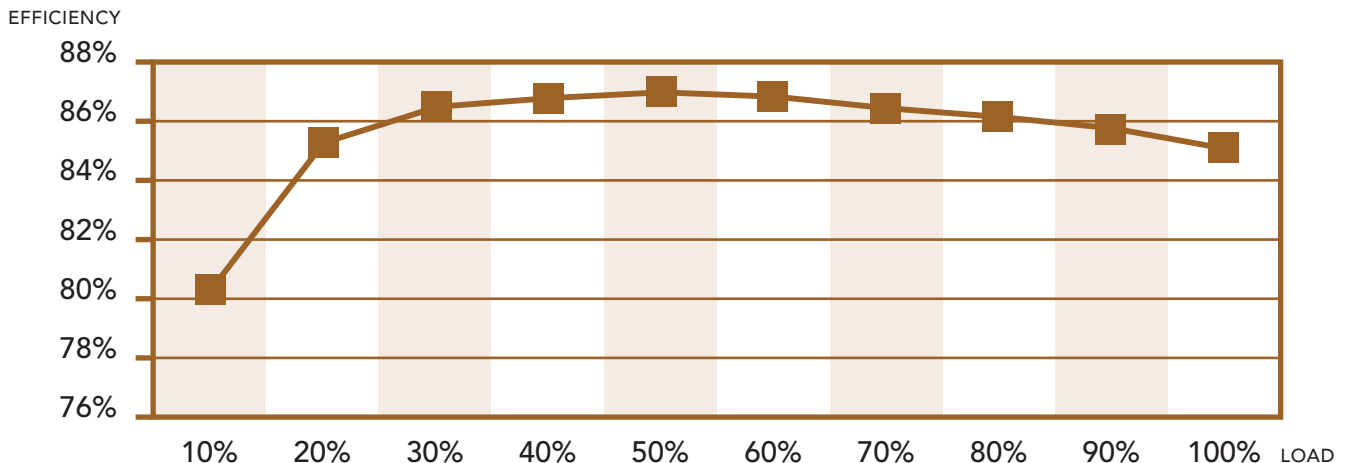



nox

URANO

nox

nox-xtreme.com