

NOX



**HUMMER**  
**ELEMENT**  
ELEGANT WOODEN MID TOWER

# ■ Disassembly instructions

Front Panel: ABS+Wood



Projection



## ■ Installation of fans



**Top:** Support 3\*120 mm / 2\*140 mm  
Support 120/240/360/280 mm Liquid cooler

**Front:** Support 3\*120 mm / 2\*140 mm / 2\*160 mm  
Support 120/240/360/280 mm Liquid cooler

**Bottom:** Support 1\*120 mm

**Rear:** Support 1\*120 mm / 1\*140 mm  
Support 120 mm Liquid cooler

**Power Box:** Support 2\*120 mm

## ■ Installation of PSU

Place the power supply into the PSU chamber and fix it with the PSU screws as shown.



## ■ 2.5" SSD and 3.5" HDD installation

### 2.5" SSD installation

Unscrew and remove HDD bracket, insert a 2.5" SSD and then fix it with screws.

### 3.5" HDD installation

Unscrew and remove HDD bracket, insert the 3.5" HDD into the bracket and then fix it with screws at both sides, then place and screw the bracket again into the chassis. then .



## ■ Motherboard installation

Fit the I/O plate into the slot, place the motherboard in its location and then fix it with screws.




## ■ VGA installation

Remove the PCI card slot, place the VGA card into your motherboard PCI slot and the chassis card slot, then fix it with screws.



## ■ USB 3.0 installation



Plug in the USB 3.0 connector to the motherboard.

## ■ Audio HD installation



Plug in the AUDIO HD connector to the motherboard.

## ■ Motherboard connections




Plug in the HDD LED connector to the motherboard as marked



Plug in the POWER LED connector to the motherboard as marked



Plug in the POWER SW connector to the motherboard as marked

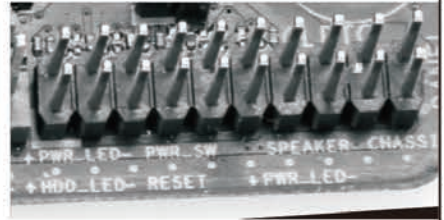

Please be careful and always connect + to + and - to -

Accessories	Name	M/B Screws	PSU Screws	HDD Screw	Copper Pillar Sleeve	Cable tie	Cable
	Image	17	6	12	1	6	6
	Accessories pictures					