

■ Disassembly instruction

- · Side panel: remove the side panels through the slit at the rear.
- · Front panel: remove the front panel from the bottom.





■ Installation of fans

· Rear panel support:

· Rear panel support:

120 mm radiator

Align the fans with the screw holes, lock with screws to secure the fans.

- · Top panel support: 3*120mm/2*140mm cooling fan
- · Top panel support: 120/240/280/360mm radiator



- · Front panel support: 3*120mm/2*140mm cooling fan
- · Front panel support: 120/240 mm radiator

■ Power supply installation






■2.5"SSD and 3.5"HDD installation

SSD installation (share the bit with HDD)

Unscrew the screws to take out the hard-drive bay from bottom, put the 2.5" hard-drive on to the bay. Align with holes, secure screws from the internal chassis.





HDD installation(share the bit with SSD)

Put the 3.5" hard-drive on to the bay, align with the holes. Lock with screws to secure the hard-drive from side of the bay.





■ Motherboard installation

Fit I/O seal into slot, Put motherboard to the location, and then fix it with screws.






■ VGA Card Installation

Remove the PCI card slot, Put in VGA Card to the slot, and then fix it with screws.





■ USB3.0 installation




Plug in USB 3.0 connector to the motherboard

■ HD Audio Installation



Plug in HD Audio connector to the motherboard

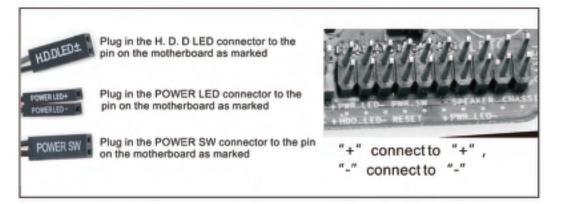

	Name	MB screw	PSU screws	screws	step stand	Cable Tie	pillar sleeve	Snap buckle
Accessory Pack	Quantity	19	6	8	3	8	1	2
	Picture			S III				AL P
	Apply to	Secure MB /SSD /GPU extension cable	Secure PSU/GPU	Secure HDD hard-drive	Secure MB	Tied and cable management	МВ	Seizing front panel and both side panel

Notes: Fan screws is not standard configuration

www.nox-xtreme.com