



PN NXHUMMERX500WBZ
EAN 8436532168550



PN NXHUMMERX600WBZ
EAN 8436532168567



PN NXHUMMERX700WBZ
EAN 8436532168574

HUMMER X 500w

SPECIFICATIONS

- 80 PLUS Bronze certified: 85% minimal efficiency guaranteed
- Semi-modular cables
- Taiwanese electrolytic capacitors certified for work in 105°C
- ATX 12V 2.31 & EPS 12V 2.91/2.92 power supply with active PFC
- Eco friendly, complies with RoHS and ERP 2013 directives
- OVP, SCP, OPP, SIP, UVP protections
- Flat and extra long cables
- 120 mm ultra silent fan with fan speed control
- Single +12V rail
- Dimensions: 150 x 86 x 157.5 mm | Net weight: 1.98 Kg

HUMMER X 600w

SPECIFICATIONS

- 80 PLUS Bronze certified: 85% minimal efficiency guaranteed
- Semi-modular cables
- Taiwanese electrolytic capacitors certified for work in 105°C
- ATX 12V 2.31 & EPS 12V 2.91/2.92 power supply with active PFC
- Eco friendly, complies with RoHS and ERP 2013 directives
- OVP, SCP, OPP, SIP, UVP protections
- Flat and extra long cables
- 120 mm ultra silent fan with fan speed control
- Single +12V rail
- Dimensions: 150 x 86 x 157.5 mm | Net weight: 2.01 Kg


HUMMER X 700w

SPECIFICATIONS

- 80 PLUS Bronze certified: 85% minimal efficiency guaranteed
- Semi-modular cables
- Taiwanese electrolytic capacitors certified for work in 105°C
- ATX 12V 2.31 & EPS 12V 2.91/2.92 power supply with active PFC
- Eco friendly, complies with RoHS and ERP 2013 directives
- OVP, SCP, OPP, SIP, UVP protections
- Flat and extra long cables
- 120 mm ultra silent fan with fan speed control
- Single +12V rail
- Dimensions: 150 x 86 x 157.5 mm | Net weight: 2.01 Kg




CONNECTORS




24 pin ATX

Power Connector
x1 unit
57 cm



EPS+12V

4+4 pin
x1 unit
67 cm




S-ATA

x7 units
50 cm



PCIe

6+2 pin
x1 unit, 55 cm
x1 unit, 15 cm



Molex

4 pin
x3 units
50 cm

VOLTAGES

500W	AC INPUT	100-240 Vac, 63-47 Hz, 10-5A				
	DC OUTPUT	+12V	+3.3V	+5V	-12V	+5VSB
	Max. Output Current	41A	15A	15A	0.3A	2.5A
	Max. Combined Wattage	492W	75W		3.6W	12.5W
	Maximum Power	500W				

600W	AC INPUT	100-240 Vac, 63-47 Hz, 10-5A				
	DC OUTPUT	+12V	+3.3V	+5V	-12V	+5VSB
	Max. Output Current	49A	15A	15A	0.3A	2.5A
	Max. Combined Wattage	588W	100W		3.6W	12.5W
	Maximum Power	600W				

700W	AC INPUT	100-240 Vac, 63-47 Hz, 10-5A				
	DC OUTPUT	+12V	+3.3V	+5V	-12V	+5VSB
	Max. Output Current	58A	18A	18A	0.3A	3A
	Max. Combined Wattage	690W	100W		16W	16W
	Maximum Power	700W				




80 PLUS BRONZE
CERTIFIED
POWER SUPPLY



EFFICIENCY 230V

EFFICIENCY

86%
85%
84%
83%
82%
81%
80%

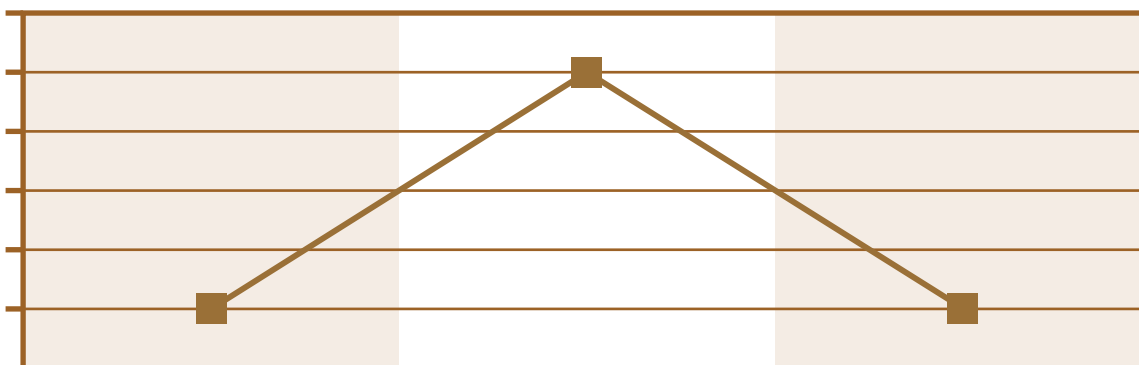


20%

50%

100%

LOAD

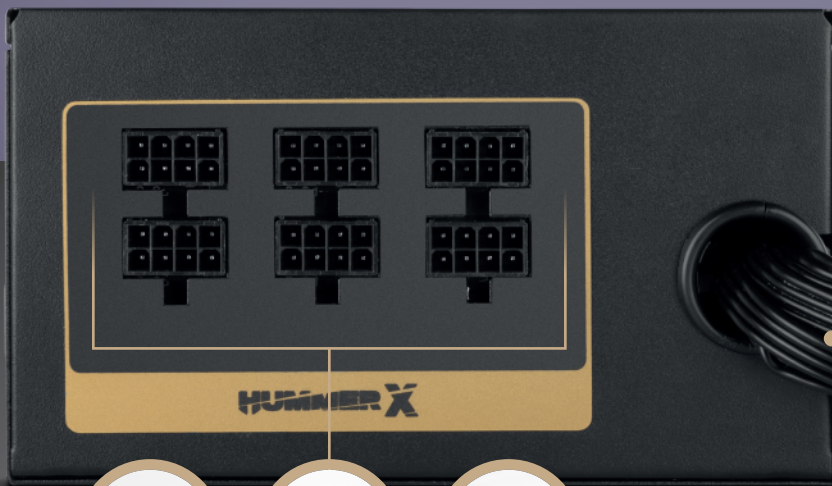

THINK
BIG,
THINK
HUMMER.

