


THERMAL T1

High Efficiency Thermal Grease



PRECISION APPLICATOR
APPLY WITHOUT SPILLING
GREASE PRECISELY

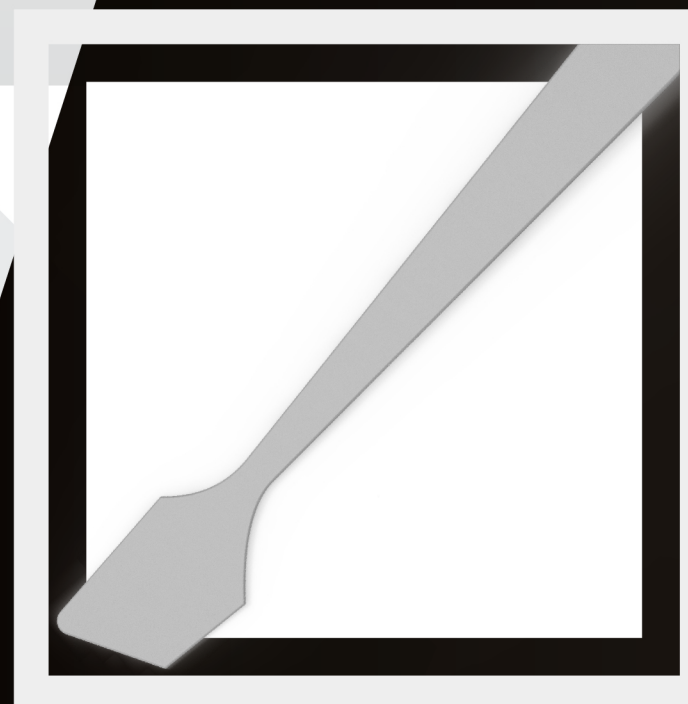

SPATULA
SPREAD THE THERMAL GREASE
CORRECTLY OVER THE SURFACE

TECHNICAL SPECS

Color	Grey
Thermal Conductivity	$\geq 8.3 \text{ W / m}^{\circ}\text{K}$
Thermal impedance	$\leq 0.0014 \text{ (}^{\circ}\text{C}^{\circ}\text{in}^2) / \text{W}$
Specific gravity	$\geq 3.7 \text{ g / cm}^3$
Viscosity	10.000 CPS
Thixotropic index	$350 \pm 10 \text{ 1/10mm}$
Moment beared temperature	-50 ~ 280°C
Operation temperature	-30 ~ 240°C

COMPONENTS

Silicone compounds	20 %
Carbon compounds	25 %
Metal oxide compounds	55 %

WEIGHT

Net weight	4 g
Gross weight	25 g

PN
NXHUMMERTT1

EAN
8436532169717