

nox

nox-xtreme.com

01

DATA SHEET

HUMMER ALPHA SERIES
BRONZE PLUS EDITION
GENERAL
SPECIFICATIONS



HUMMER α 500w

SPECIFICATIONS

- 80 PLUS Bronze certified: 85% minimal efficiency guaranteed
- ATX 12V 2.31 & EPS 12V 2.91/2.92 power supply with active PFC
- Eco friendly, complies with RoHS and ERP 2013 directives
- OVP, SCP, OPP, SIP, UVP protections
- Flat and extra long cables
- 120 mm ultra silent fan with fan speed control
- Single +12V rail
- Dimensions: 150 x 86 x 157.5 mm
- Net weight: 1.98 Kg

HUMMER α 600w

SPECIFICATIONS

- 80 PLUS Bronze certified: 85% minimal efficiency guaranteed
- ATX 12V 2.31 & EPS 12V 2.91/2.92 power supply with active PFC
- Eco friendly, complies with RoHS and ERP 2013 directives
- OVP, SCP, OPP, SIP, UVP protections
- Flat and extra long cables
- 120 mm ultra silent fan with fan speed control
- Single +12V rail
- Dimensions: 150 x 86 x 157.5 mm
- Net weight: 1.98 Kg




PN NXHUMMERA500WBZ
EAN 8436587971150



PN NXHUMMERA600WBZ
EAN 8436587971167




CONNECTIONS




24 pin ATX

Power connector
x1 unit
500 mm



EPS+12V

4+4 pin
x1 unit
600 mm




S-ATA

x5 units
500 mm



PCIe

6+2 pin
x1 unit
500 mm



Molex

4 pin
x4 units + 1x FDD
500 mm

VOLTAGES

AC INPUT	100-240 Vac, 63-47 Hz, 10-5A				
DC OUTPUT	+12V	+3.3V	+5V	-12V	+5VSB
Max. Output Current	41A	15A	15A	0.3A	2.5A
Max. Combined Wattage	492W	75W		3.6W	12.5W
Maximum Power	500W				

AC INPUT	100-240 Vac, 63-47 Hz, 10-5A				
DC OUTPUT	+12V	+3.3V	+5V	-12V	+5VSB
Max. Output Current	49A	15A	15A	0.3A	2.5A
Max. Combined Wattage	588W	100W		3.6W	12.5W
Maximum Power	600W				




80 PLUS BRONZE
CERTIFIED
POWER SUPPLY



EFFICIENCY

80 PLUS BRONZE

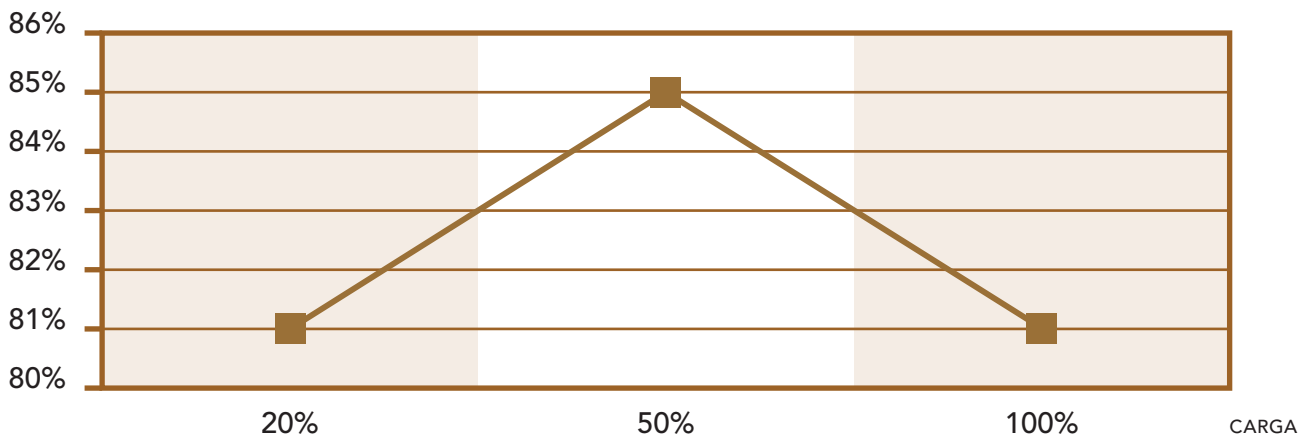

nox

nox-xtreme.com

03

DATA SHEET

HUMMER ALPHA SERIES BRONZE PLUS EDITION GENERAL SPECIFICATIONS



X4



MOLEX

X5



SATA

X1



MB

X1



PCI-E

X1



EPS 12V

THINK
BIG, 
THINK
HUMMER.

nox

nox-xtreme.com